
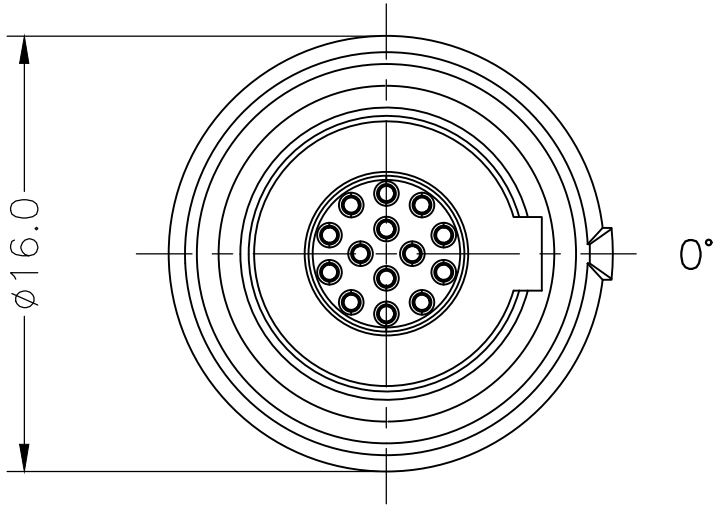
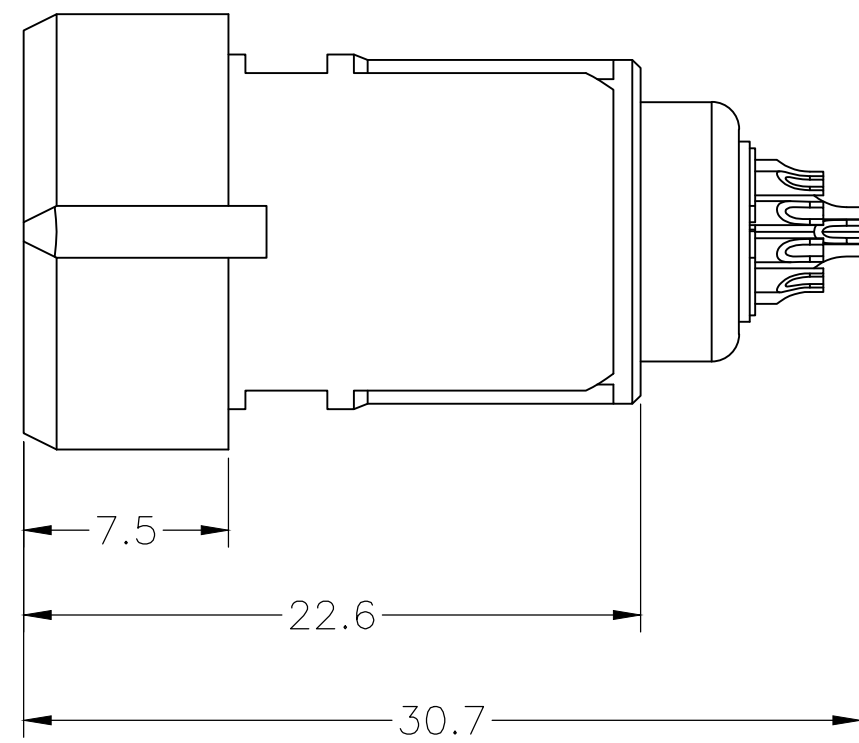
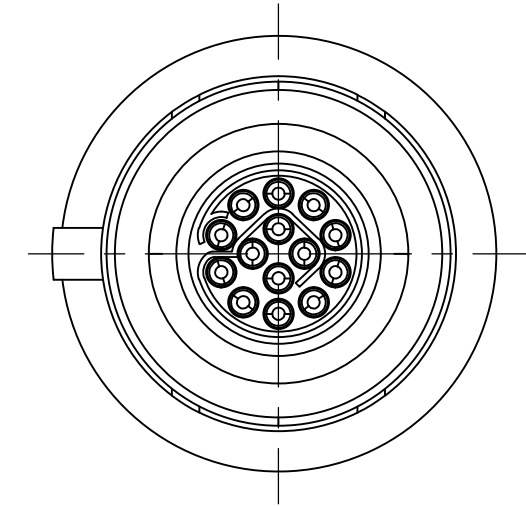
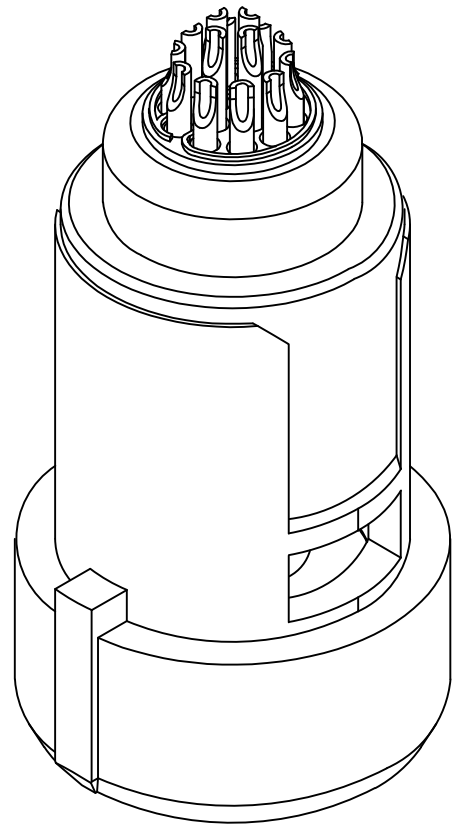
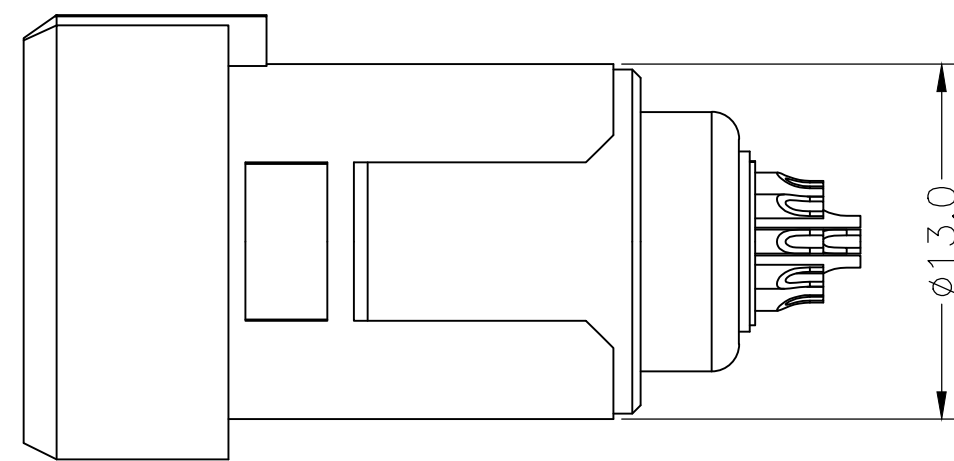




NOTE:

- MATERIAL:
 - SHELL: THERMOPLASTIC,PSU GREY,UL94V-0
 - INSERT: THERMOPLASTIC,PEEK,UL94V-0
 - CENTER CONTACT : COPPER ALLOY, Au PLATING
- NUMBER OF CONTACT : 14 POSITION
- ELECTRICAL REQUIREMENTS
 - INSULATION RESISTANCE-PIN TO PIN-1000Gohm, MIN
 - DIELECTRIC WITHSTAND-PIN TO PIN-600VDC
- RoHS DIRECTIVE COMPLIANCE

3D MOLD

THIRD ANGLE PROJECTION 		TOLERANCES UNLESS OTHERWISE SPECIFIED		<div></div> <div>Dongguan Circon Technology Co.,Ltd.</div>			
UNITS ☒ mm ☐ INCH		0 PLC ± 1.00 1 PLC ± 0.50 2 PLC ± 0.25 3 PLC ± 4 PLC ±		TITLE: 1P CIRCULAR CONNECTOR FIXED SOCKETS,SNAP-ON FIXING			
ANGLES 0 PLC ± 3 1 PLC ± 2							
APPROVED BY	JACK	DATE	2024-6-11	C	DRAWING NO.	A-M-525	REV.
CHECKED BY	CHARLES	DATE	2024-6-11		PART NO.	1PAFGP214GOJB0	A0
DRAWN BY	ANDY	DATE	2024-6-11	SIZE: A3	SCALE: 1:1	SHEET: 1 OF 1	